




Size	Panel	Profile
LENGTH	2700 mm	2700 mm
WIDTH	520 mm	27 mm
TOTAL THICKNESS	21 mm	21 mm

Product Description


The wooden slats come in 4 different colors, matching profiles also available. Easy to install and to maintain, sustainable and magnificent acoustic results!

Colors

Our acoustic panels are available in following colors:




REGULAR - 21 MM - NATURAL



REGULAR - 21 MM - INVISIBLE



REGULAR - 21 MM - WALNUT



REGULAR - 21 MM - EBONY

Materials

The slats are made of 12 mm black MDF-boards, with environmental class E0. The MDF is finished with technical veneer, containing small cracks, to create a natural look. All slats are 27 mm wide, with 13mm space between them. The slats are fixed on a base of black acoustic felt. This base is 9 mm thick and 50% made of recycled materials.

Maintenance


The panels can be easily cleaned with a duster or a hard-wrung towel. Do not rub, as not to damage the surface. Caution: Always test on a small area before treating the entire surface.

Installation


For more information, we refer to our installation guide. A recap is given here below, showing you three different options. Be sure to check the Acoustics section in this technical datasheet, as the chosen installation method will influence the acoustic performance. A framework and insulation contribute remarkably to higher sound absorption values.

Installation methods:


1. Direct gluing against the wall (wall must be flat, clean and dustfree), with MS polymer-based adhesive.

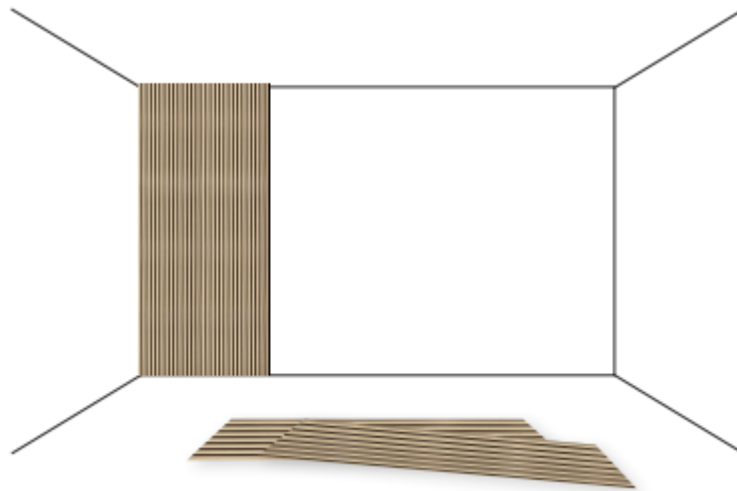

2. Mounting the panels on underlying battens (50mm thick, 60cm between the battens) with black screws.

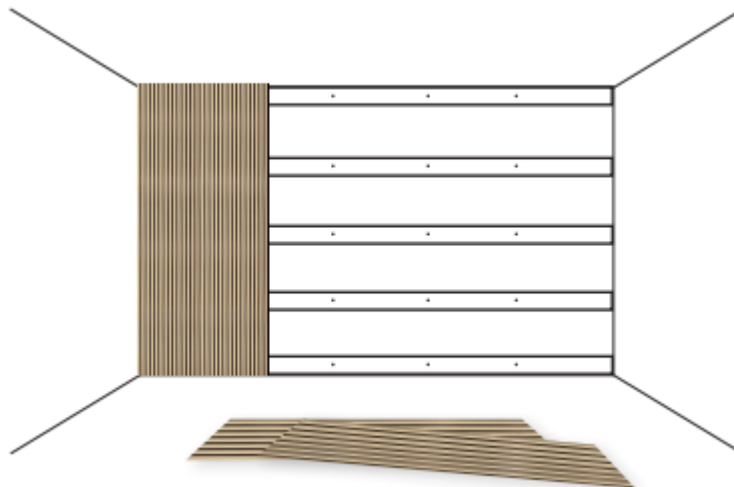


3. Same installation 2, but mineral wool (same thickness as battens) is placed between the battens.

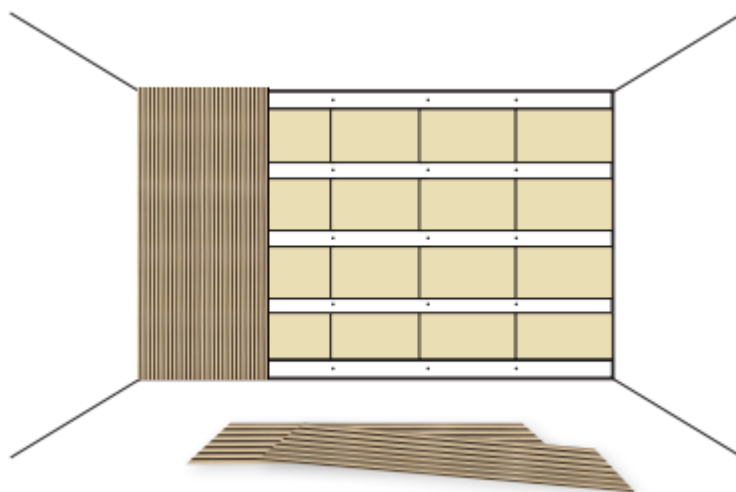


Overview technical specifications

MODEL	Wooden slat wall panel
PANEL SIZE	Length: 2700 mm – Width: 520 mm – Thickness: 21 mm
MATERIALS	12 mm MDF + 9 mm polyester
PANEL DESIGN	Single slat (width 27 mm), placed every 13 mm on PET panel (see image below)
FINISH	TECH veneer (0,6 mm + lacquer finishing)
FIRE RATING	Class B (according to EN13501-1)
ENVIRONMENTAL CLASS	EN 13986: Black MDF : E0 – Polyester board: E1
DURABILITY	PET panel made of recycled materials FSC certified

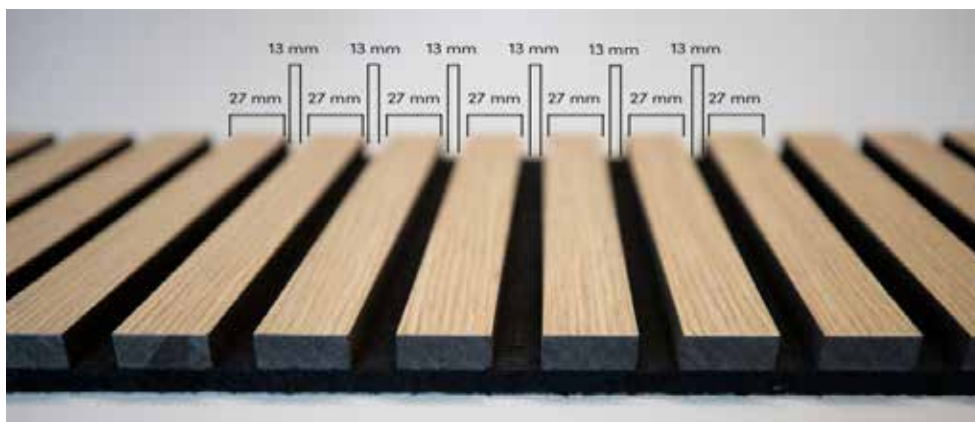


Acoustics

Glass, concrete, steel,... are hard materials that make the sounds reflect and give your room bad acoustics. The best way to reduce the reverberation* in a room, is to counterweight the hard materials with absorption materials, such as our wooden panels.

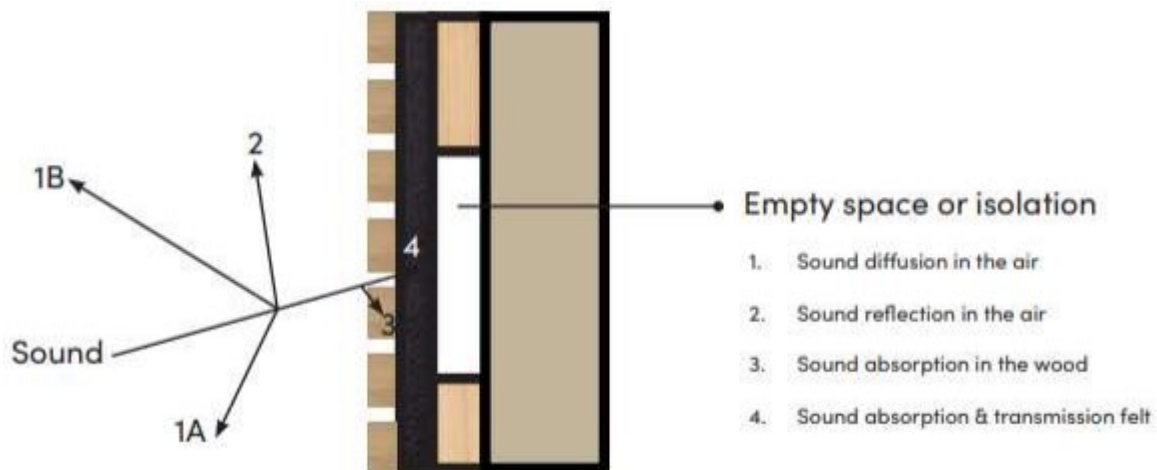

The acoustic panels have been tested in a certified laboratory, to measure the sound absorption according to ISO354. The test results show that our panels improve the acoustics significantly.

INSTALLATION METHOD	aw	Class
1. Direct gluing	0,30	D
2. Framework airgap 50mm	0,65	C
3. Framework airgap 50mm + isolation	0,90	A

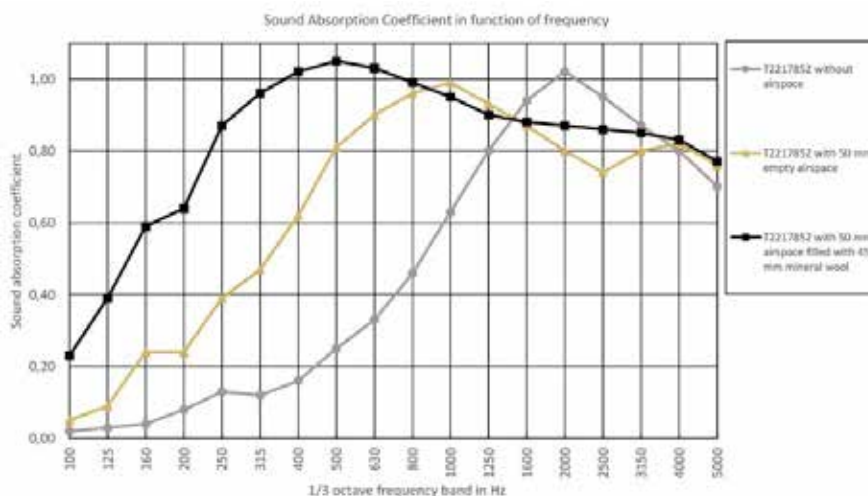

* En acoustique, la réverbération est la persistance du son ou de l'écho après la production d'un son.